



## CC2200 Double drum vibratory rollers



### TECHNICAL DATA

#### MASSES

Max. operating mass	9000 kg
Operating mass (incl. Canopy)	7400 kg
Operating mass (incl. ROPS)	7600 kg
Operating mass (incl. Cab)	7800 kg
Module mass (front/rear)	3800 kg/3800 kg

#### COMPACTION

Centrifugal force (high/low amplitude)	78 kN/67 kN
Nominal amplitude (high/low)	0.7 mm/0.3 mm
Static linear load (front/rear)	25.3/25.3 kg/cm
Vibration frequency (high/low amplitude)	48 Hz/67 Hz
Water tank	750 l

#### COMPACTION (CE)

Centrifugal force (high/low amplitude)	72 kN/38 kN
Nominal amplitude (high/low)	0.7 mm/0.2 mm
Static linear load (front/rear)	25.3/25.3 kg/cm
Vibration frequency (high/low amplitude)	48 Hz/62 Hz
Water tank volume	750 l

#### TRACTION

Speed range	0-12 km/h
Vertical oscillation	±7°
Max. theoretical gradeability	42 %
Turning radius, inside	5,070 mm
Turning radius, outside	6,570 mm
Off-set	335 mm

#### ENGINE

Manufacturer/Model	Cummins QSB 3.3 HT T4f
Type	Watercooled turbo Diesel
Rated power, SAE J1995	1. 74 kW (99hp) @ 2,200 rpm 2. 60 kW (80hp) @ 2,200 rpm
Fuel tank capacity	130 l

#### HYDRAULIC SYSTEM

Driving	Axial piston pump with variable displacement. Axial piston motors (2) with variable displacement.
Vibration	Axial piston pumps(2) with variable displacement. Axial piston motors(2) with const. displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in both drums.

Find us locally at [www.hexindo-tbk.co.id](http://www.hexindo-tbk.co.id)



We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

### SCAN ME





## CC2200 Double drum vibratory rollers

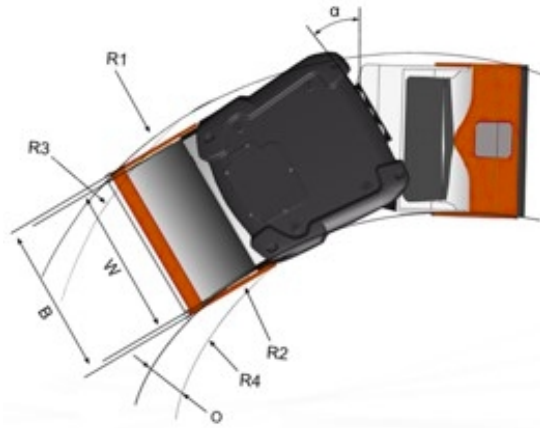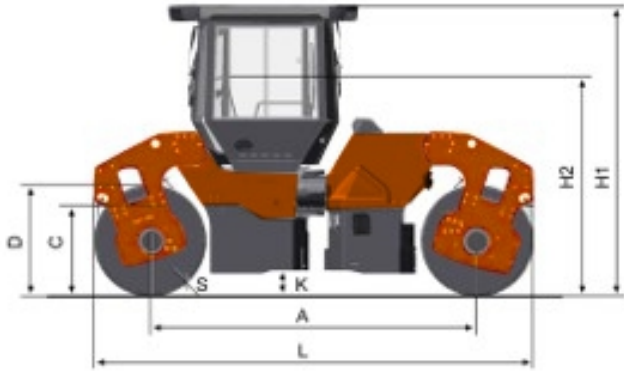

### DIMENSIONS

#### DIMENSIONS

A. Wheelbase	3,340 mm
B. Width	1,620 mm
C. Curb clearance	715 mm
D. Drum diameter	1150 mm
H1. Height, with ROPS/cab	2990 mm
K. Ground clearance	270 mm
L. Length	4490 mm
O. Off-set	335 mm
R1. Turning radius, outside	6570 mm
R2. Turning radius, inside	5070 mm
R3. Turning radius with off-set, outside	4890 mm
R4. Turning radius with off-set, inside	3390 mm
S. Drum shell thickness	20 mm
W. Drum width	1500 mm
α. Steering angle	±32°

Find us locally at [www.hexindo-tbk.co.id](http://www.hexindo-tbk.co.id)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

### SCAN ME

